


## INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification <sup>6</sup> : <b>B41F 13/004, 33/00, 13/12</b>		<b>A1</b>	(11) International Publication Number: <b>WO 98/16384</b>
			(43) International Publication Date: 23 April 1998 (23.04.98)
(21) International Application Number: PCT/GB97/02804		(81) Designated States: AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CU, CZ, DE, DK, EE, ES, FI, GB, GE, GH, HU, ID, IL, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, UA, UG, US, UZ, VN, YU, ZW, ARIPO patent (GH, KE, LS, MW, SD, SZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, ML, MR, NE, SN, TD, TG).	
(22) International Filing Date: 10 October 1997 (10.10.97)			
(30) Priority Data: 9621324.4 12 October 1996 (12.10.96) GB			
(71) Applicant (for all designated States except US): GOSS GRAPHIC SYSTEMS LIMITED [GB/GB]; Greenbank Street, Preston, Lancashire PR1 7LA (GB).			
(72) Inventors; and			
(75) Inventors/Applicants (for US only): COSTIN, Ian, John [GB/GB]; 40 Knot Lane, Walton-le-Dale, Preston, Lancashire PR5 4BQ (GB). DONALDSON, Peter, Andrew [GB/GB]; 14 St. Walburses Gardens, Ashton, Preston, Lancashire PR2 2QJ (GB). CARSLLEY, Howard, Stephen [GB/GB]; 145 Anchorsholme Lane East, Thorton Cleveleys, Lancashire FY5 3BS (GB).		Published With international search report. Before the expiration of the time limit for amending the claims and to be republished in the event of the receipt of amendments.	
(74) Agents: DEMPSTER, Benjamin, John, Naftel et al.; Withers & Rogers, 4 Dyer's Buildings, Holborn, London EC1N 2JT (GB).			

(54) Title: PRINTING APPARATUS

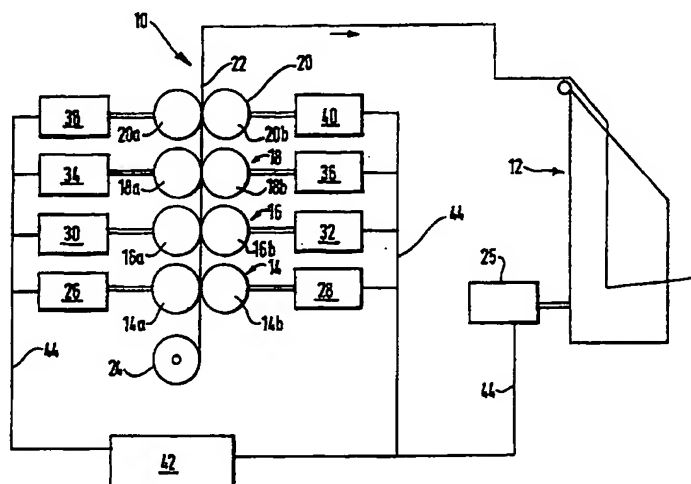

## (57) Abstract

Drive means is provided for printing apparatus of the kind comprising a plurality of process units (12-20) each for effecting a respective repeat operation on web (22) or sheet material fed along a feed path defined at least in part by said units (12-20). The drive means comprises an electrically powered rotary motor (25-40) individual to each said unit (12-20) or to one or more rotary elements (14a, 14b, 16a, 16b, 18a, 18b, 20a, 20b) within a unit, and control means (42) operating to regulate the running speed and angular phasing of each said motor (25-40) individually in relation to a predetermined master standard programmed in to the control means (42). The control means (42) further includes speed correction means for varying the relative phase angles of one or more of the motor drive outputs by a preselected factor proportionate to the overall running speed of the apparatus to maintain accurate registration relative to the material of the various operations carried out by said units (12-20) throughout a substantial range of operating speeds.

**FOR THE PURPOSES OF INFORMATION ONLY**

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal
AU	Australia	GA	Gabon	LV	Latvia	SZ	Swaziland
AZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BE	Belgium	GN	Guinea	MK	The former Yugoslav Republic of Macedonia	TM	Turkmenistan
BF	Burkina Faso	GR	Greece			TR	Turkey
BG	Bulgaria	HU	Hungary	ML	Mali	TT	Trinidad and Tobago
BJ	Benin	IE	Ireland	MN	Mongolia	UA	Ukraine
BR	Brazil	IL	Israel	MR	Mauritania	UG	Uganda
BY	Belarus	IS	Iceland	MW	Malawi	US	United States of America
CA	Canada	IT	Italy	MX	Mexico	UZ	Uzbekistan
CF	Central African Republic	JP	Japan	NE	Niger	VN	Viet Nam
CG	Congo	KE	Kenya	NL	Netherlands	YU	Yugoslavia
CH	Switzerland	KG	Kyrgyzstan	NO	Norway	ZW	Zimbabwe
CI	Côte d'Ivoire	KP	Democratic People's Republic of Korea	NZ	New Zealand		
CM	Cameroon	KR	Republic of Korea	PL	Poland		
CN	China	KZ	Kazakhstan	PT	Portugal		
CU	Cuba	LC	Saint Lucia	RO	Romania		
CZ	Czech Republic	LI	Liechtenstein	RU	Russian Federation		
DE	Germany	LK	Sri Lanka	SD	Sudan		
DK	Denmark	LR	Liberia	SE	Sweden		
EE	Estonia			SG	Singapore		

## PRINTING APPARATUS

This invention relates to printing apparatus, particularly for highspeed rotary multicolour web printing as by the offset process in the production of newspapers and periodicals though the invention may have application to other types of single or multicolour web or sheet fed printing processes and apparatus.

It is known to provide printing apparatus having individual process units each driven mechanically independently by its own electric motor instead of coupling the units together by shafts, gearing etc to be driven in synchronism from a common motor. The individual motors are of a type which can be extremely accurately controlled electrically as to running speed and angular position of their drive output to provide synchronisation of the various units and accurate registration of their respective operations on the web or material being processed. This kind of drive arrangement is commonly referred to as "shaftless drive" and many examples are well known in the art such as in our GB 2149149A.

Although shaftless drive is successful in providing accurate and consistent results when the printing apparatus is running at its service speed, problems arise which have not hitherto been solved during changes in operating speed of the apparatus as a whole and, consequently, the linear speed of the web, due mainly to stretching or other distortion of the web consequent upon the speed change. This results in the operations carried out by the different units becoming out of register, for example registration of different colours in multicolour printing is lost giving rise to substantial wastage and loss of production time.

The apparatus has to be run up to speed on start-up and has to be run down again to close down giving wastage at the beginning and end of every print run.

The object of the invention is to provide printing apparatus having shaftless drive with all its consequent advantages and which is able to maintain accurate synchronisation and registration throughout substantial changes in overall running speed.

According to a first aspect of the invention there is provided drive means for printing apparatus of the kind comprising a plurality of process units each for effecting a respective repeat operation on web or sheet material fed along a feed path defined at least in part by said units; said drive means comprising an electrically powered rotary motor individual to each said unit or to one or more rotary elements within a unit, and control means operating to regulate the running speed and angular phasing of each said motor individually in relation to a predetermined master standard programmed in to the control means: characterised in that the control means further includes speed correction means for varying the relative phase angles of one or more of the motor drive outputs by a preselected factor proportionate to the overall running speed of the apparatus to maintain accurate registration relative to the material of the various operations carried out by said units throughout a substantial range of operating speeds.

The invention further resides in a method of operating printing apparatus incorporating shaftless drive including the steps of determining the extent of registration error caused by changes in overall operating speed taking place without any adjustment in relative speed of individual drive motors or changes in relative angular phasing of their drive outputs to provide an algorithm representing register error as a function of said operating speed, and applying that algorithm automatically to vary the relative phase angles of one or more of the motor drive outputs by a preselected factor proportionate to the overall running speed of the apparatus whereby registration is correctly maintained throughout a substantial range of operating speeds.

An example of the invention is now more particularly described with reference to the accompanying drawing being a diagram of continuous web multicolour offset printing apparatus.

The apparatus comprises a web-fed four colour printing line 10 and a folder 12 downstream thereof, thus the apparatus shown consists basically of five process units, four successive colour units 14, 16, 18, 20 and folder unit 12.

The continuous web 22 passes from a reel or other source 24 along printing line 10 and then to folder unit 12 in conventional manner.

The colour units 14-20 are of conventional construction incorporating plate and blanket cylinders and dampening and ink roll trains well known in the art and therefore not detailed in the drawing.

However each of the units is independently driven by respective electric motors of known type capable of very accurate electrical control of their running speed and of the angular position of their drive outputs, this shaftless drive arrangement dispensing with the need for mechanical coupling of the individual units.

Folder unit 12 is individually driven by a said motor 25.

In this particular example each colour unit 14-20 incorporates two said drive motors. Taking unit 14 it has a drive motor 26 powering a first roll or cylinder couple 14a and another drive motor 28 powering couple 14b.

In the same way unit 16 has motors 30 and 32 driving couple 16a and 16b respectively; unit 18 has motors 34 and 36 driving couples 18a and 18b respectively; and unit 20 has motors 38 and 40 driving couples 20a and 20b respectively.

Each of the nine drive motors 25-40 is linked to an electronic control unit 42 by control circuitry 44. Unit 42 operates to regulate the running speed and relative angular phasing of the motors so that the operations of the various units are synchronised to provide accurate colour registration and correct positioning of the folding operations on web 22 with the apparatus as a whole running at its normal operating speed.

Control unit 42 is pre-programmed with a master standard from which all the motors are regulated and held in synchronisation, an arrangement which may be regarded as a virtual electrical line shaft equivalent to mechanically coupling together the various motor drive inputs, i.e. every motor is controlled as a slave from the master control unit 42. This avoids reliance on servo regulation by closed loop or other feedback from scanning operational parameters such as shaft speed and/or web speed at a given point or points as it has been found in practice that reliance on such servo control systems does not give fast enough response for high quality results at high rates of production.

Experiments have shown, surprisingly, that changes in overall operating speed as when starting up or closing down a print run have a constant and therefore predictable effect on registration. Repeat test runs and accurate measurement of the degree of, for example, incorrect colour registration relative to changes in overall press speed enable an algorithm to be derived for programming the control unit 42 with data for automatic compensation relative to the overall running speed of the apparatus, automatically shifting the relative phase angles of the drive outputs of motors 25-40 individually by preselected factors.

The correction will vary depending on the operating relationship of the various units and of the roll couples or other individually driven rotary elements within a unit, thus the pair of drive motors, for example 26 and 28 of an individual unit e.g. 14 will normally be maintained in synchronism with each other but the relative

phase angle between those motors and the motors of the other units 16-20 and 12 will be varied as a function of overall speed and will also be varied relative to each other.


Unexpectedly, once the algorithm and the required correction factors have been established accuracy of registration will be maintained, even in successive print runs, with little or no further setting resulting in substantial economies of time and trouble, e.g. when making ready, as well as a very substantial reduction in wastage as copies produced during speed changes, as when running up or closing down, will largely be of acceptable standard.

It will be understood that the invention may be applied to various shaftless drive arrangements, in some applications a motor may drive a single roll or cylinder either directly or through gearing, timing belts or other transmission means, in other applications the single motor may drive a train of rolls or cylinders or even an entire colour unit or other web or sheet process unit instead of driving a couple as described above.

**CLAIMS**

1. Drive means for printing apparatus of the kind comprising a plurality of process units each for effecting a respective repeat operation on web or sheet material fed along a feed path defined at least in part by said units; said drive means comprising an electrically powered rotary motor individual to each said unit or to one or more rotary elements within a unit, and control means operating to regulate the running speed and angular phasing of each said motor individually in relation to a predetermined master standard programmed into the control means: characterised in that the control means further includes speed correction means for varying the relative phase angles of one or more of the motor drive outputs by a preselected factor proportionate to the overall running speed of the apparatus to maintain accurate registration relative to the material of the various operations carried out by said units throughout a substantial range of operating speeds.
2. Drive means as claimed in claim 1, wherein the drive means comprises at least two rotary motors to each unit, in each unit at least one rotary motor driving a rotary element to one side of the feed path and at least one rotary motor driving a rotary element to the other side of the feed path.
3. A method of operating printing apparatus incorporating shaftless drive including the steps of determining the extent of registration error caused by changes in overall operating speed taking place without any adjustment in relative speed of individual drive motors or changes in relative angular phasing of their drive outputs to provide an algorithm representing register error as a function of said operating speed, and applying that algorithm automatically to vary the relative phase angles of one or more of the motor drive outputs by a preselected factor proportionate to the overall running speed of the apparatus whereby registration is correctly maintained throughout a substantial range of operating speeds.



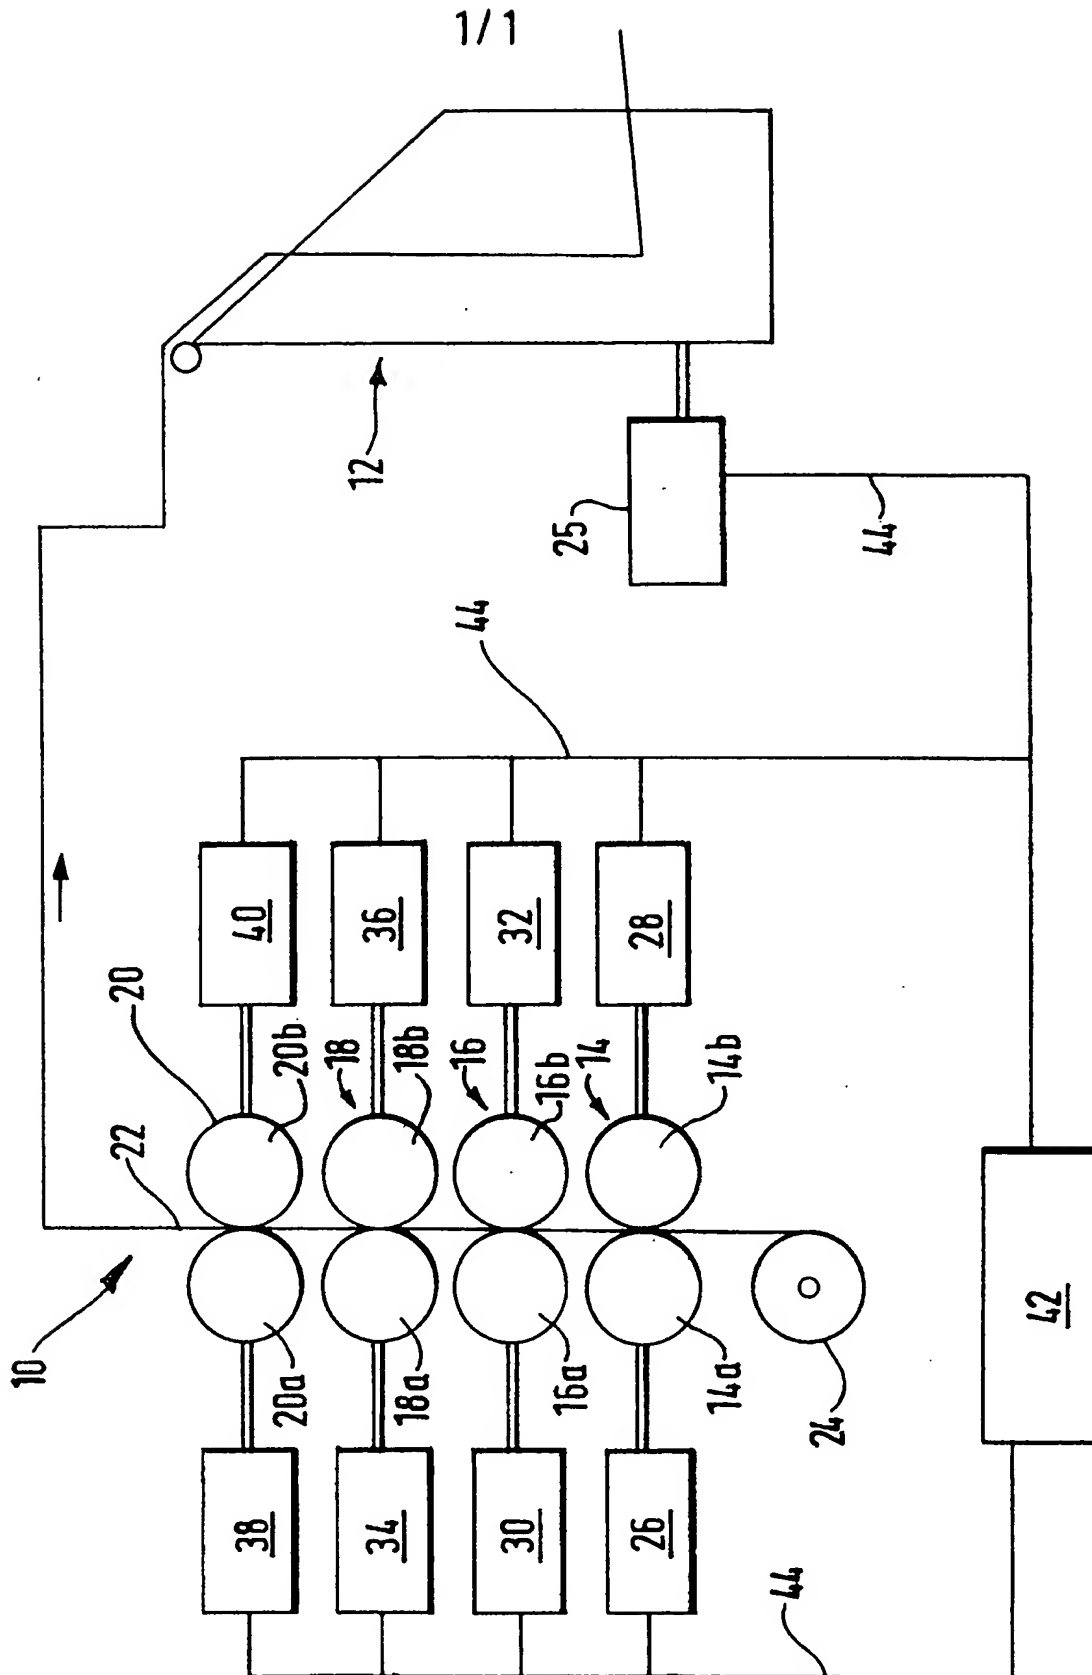

# INTERNATIONAL SEARCH REPORT

Inter. Application No.

PCT/GB 97/02804

## A. CLASSIFICATION OF SUBJECT MATTER

IPC 6 B41F13/00 B41F33/00 B41F13/12

According to International Patent Classification (IPC) or to both national classification and IPC

## B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 6 B41F

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

## C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	DE 41 37 979 A (HEIDELBERGER DRUCKMASCH AG) 27 May 1993 see the whole document ----	1-3
A	EP 0 709 184 A (ROLAND MAN DRUCKMASCH) 1 May 1996 see the whole document ----	1-3
A	US 5 263 413 A (IKEGUCHI MASAO) 23 November 1993 see the whole document ----	1-3
A	DE 40 31 964 A (LEHMACHER & SOHN MASCH) 23 April 1992 see the whole document -----	1-3



Further documents are listed in the continuation of box C.



Patent family members are listed in annex.

### \* Special categories of cited documents:

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier document but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.

"&" document member of the same patent family

Date of the actual completion of the international search

23 February 1998

Date of mailing of the international search report

03/03/1998

Name and mailing address of the ISA

European Patent Office, P.O. 5818 Patentlaan 2  
NL - 2280 HV Rijswijk  
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,  
Fax: (+31-70) 340-3016

Authorized officer

Madsen, P

# INTERNATIONAL SEARCH REPORT

Information on patent family members

Inter Application No

PCT/GB 97/02804

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
DE 4137979 A	27-05-93	FR 2683767 A GB 2261629 A,B JP 5229103 A US 5481971 A	21-05-93 26-05-93 07-09-93 09-01-96
EP 0709184 A	01-05-96	DE 4434843 A DE 9421695 U	18-04-96 15-05-96
US 5263413 A	23-11-93	JP 4099627 A DE 69113979 D DE 69113979 T EP 0495987 A WO 9201562 A	31-03-92 23-11-95 21-03-96 29-07-92 06-02-92
DE 4031964 A	23-04-92	NONE	

**This Page is Inserted by IFW Indexing and Scanning  
Operations and is not part of the Official Record**

**BEST AVAILABLE IMAGES**

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

☒ **BLACK BORDERS**

☐ **IMAGE CUT OFF AT TOP, BOTTOM OR SIDES**

☐ **FADED TEXT OR DRAWING**

☐ **BLURRED OR ILLEGIBLE TEXT OR DRAWING**

☐ **SKEWED/SLANTED IMAGES**

☐ **COLOR OR BLACK AND WHITE PHOTOGRAPHS**

☐ **GRAY SCALE DOCUMENTS**

☐ **LINES OR MARKS ON ORIGINAL DOCUMENT**

☐ **REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY**

☐ **OTHER:** \_\_\_\_\_

**IMAGES ARE BEST AVAILABLE COPY.**

**As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.**